

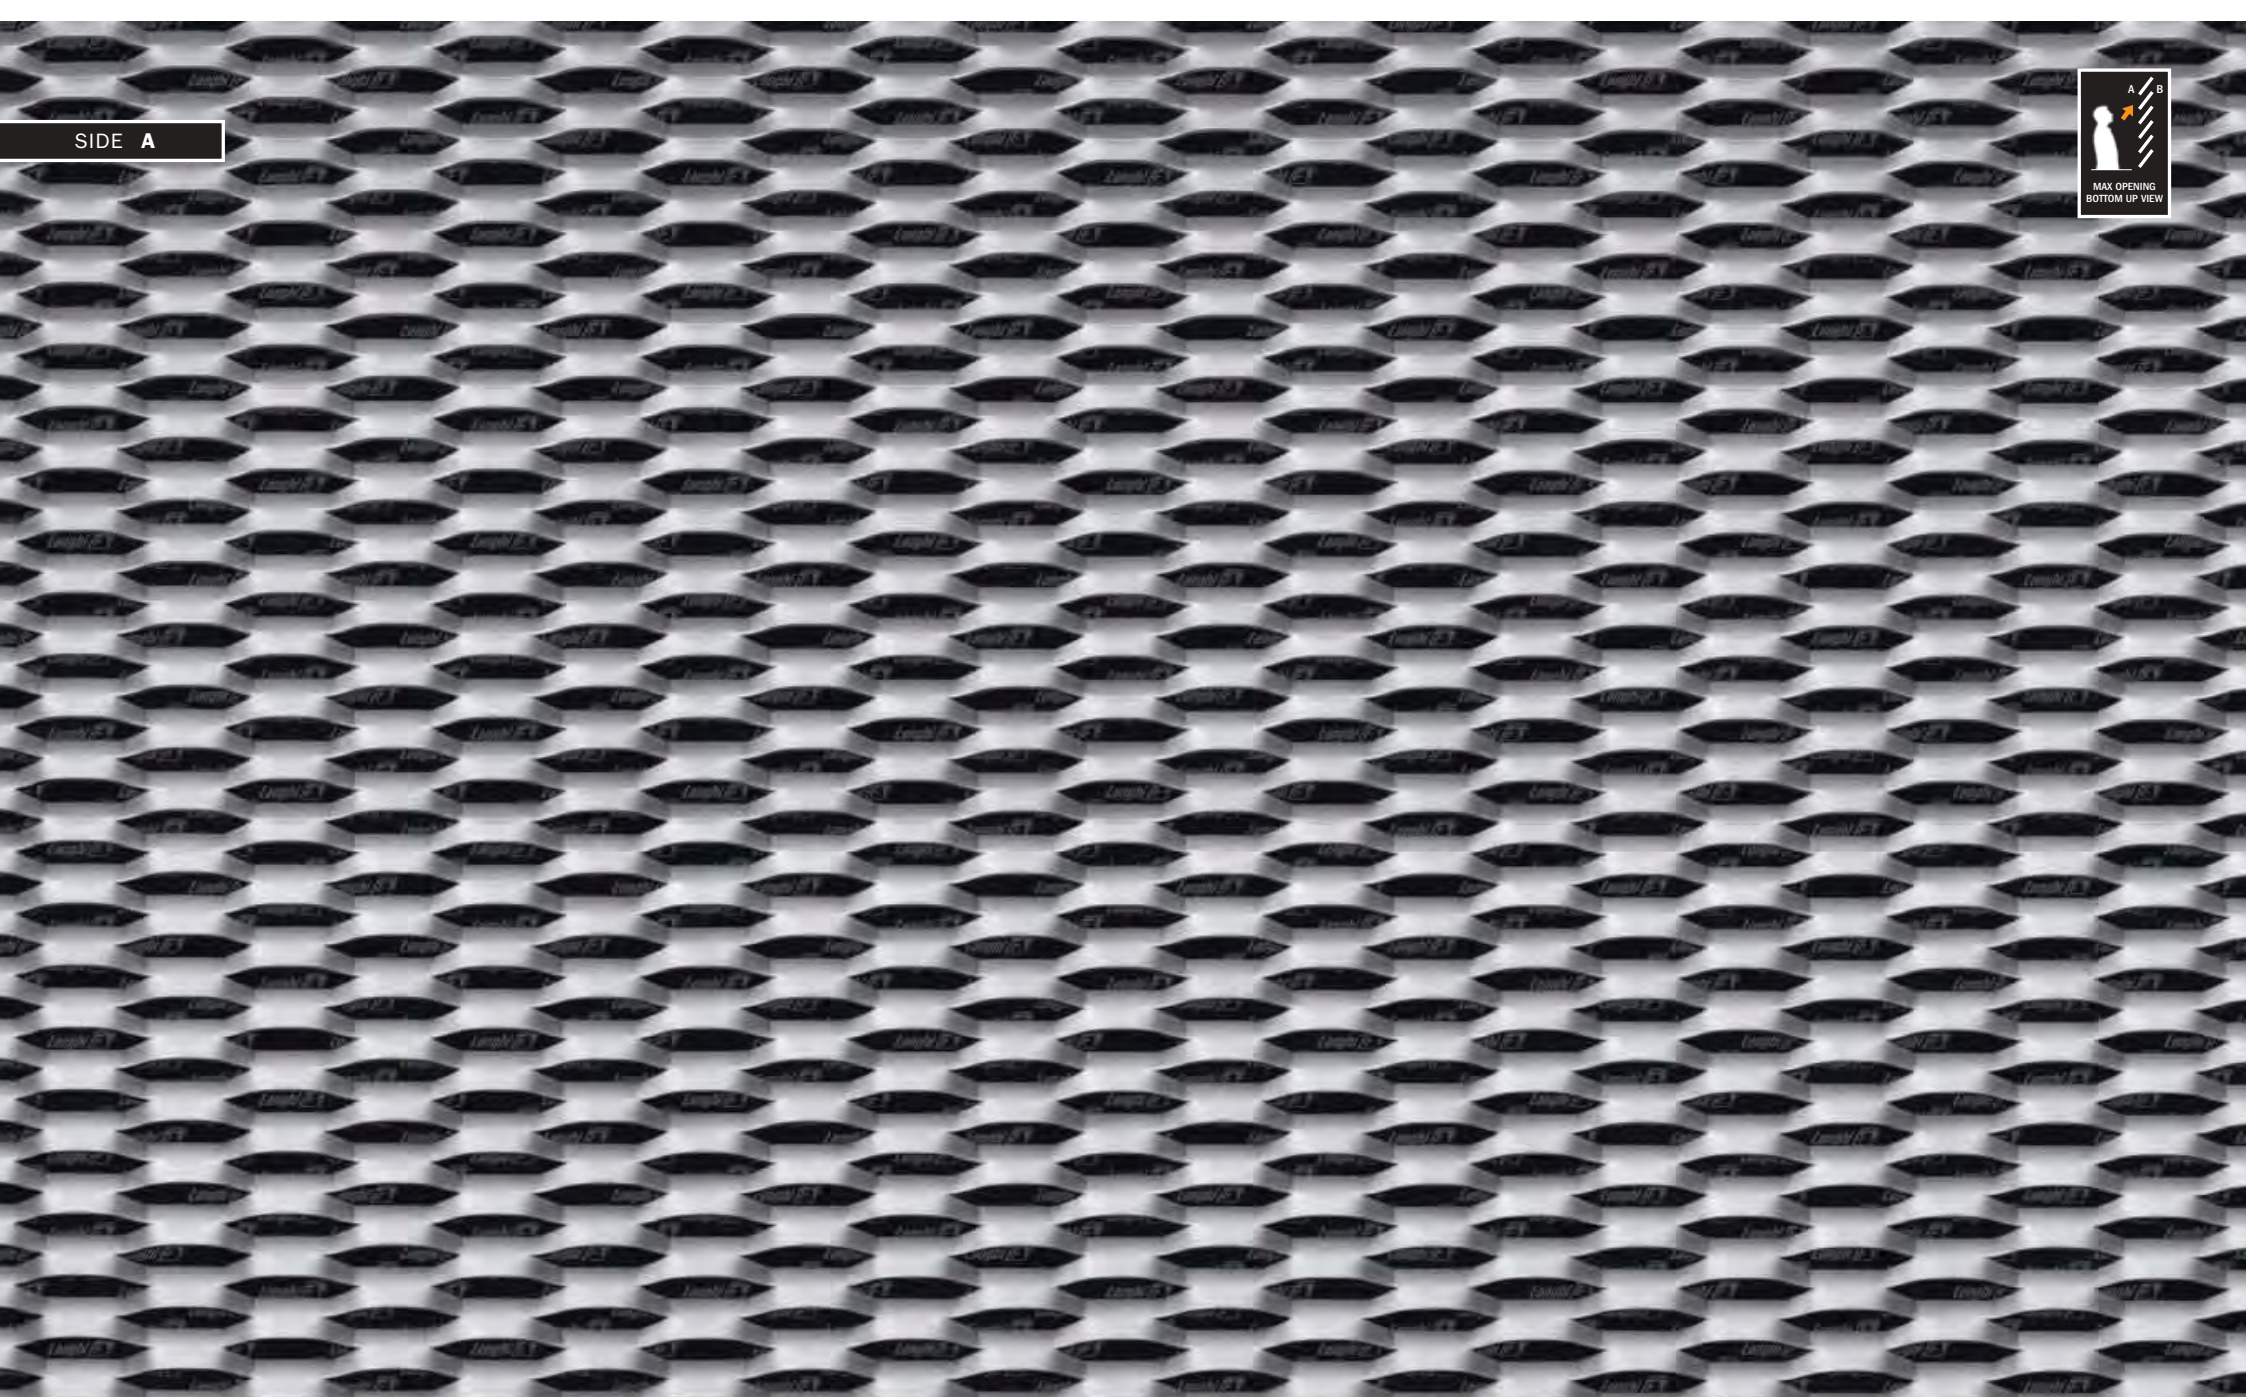


SIDE A



# Filis 21

**E 45 x 15 (13,4) - 5 x t**  
 |TYPE |SW | SW NOMINAL | SW ACTUAL |w |t



Type - LW x SW (SW actual) - w x t (mm)	Mild steel (kg/m <sup>2</sup> )	Aluminium (kg/m <sup>2</sup> )	Available sheet size (mm)	Sheet thickness (mm) measured at the centre	% front open area
E 45 x 15 (13,4) - 5 x <b>1,5</b>	8,80	3,00	LW 1000 x SW 2000	7 (-) ◆	33,3 (-)
E 45 x 15 (13,4) - 5 x <b>2,0</b>	11,60	4,00	LW 1250 x SW 2500		
E 45 x 15 (13,4) - 5 x <b>3,0</b>	17,50	6,00	LW 1500 x SW 3000		
			LW 2000 - 2500 x SW 2000 Max		

◆ Framing profiles: see page 192

SIDE B




# Fils 21



## E 45 x 15 (13,4) - 5 x t

|TYPE| LW | SW NOMINAL | SW ACTUAL | w | t



Type - LW x SW (SW actual) - w x t (mm)	Mild steel (kg/m <sup>2</sup> )	Aluminium (kg/m <sup>2</sup> )	Available sheet size (mm)	Sheet thickness (mm) measured at the centre	% front open area
E 45 x 15 (13,4) - 5 x <b>1,5</b>	8,80	3,00	LW 1000 x SW 2000	7 (-) ♦	33,3 (-)
E 45 x 15 (13,4) - 5 x <b>2,0</b>	11,60	4,00	LW 1250 x SW 2500		
E 45 x 15 (13,4) - 5 x <b>3,0</b>	17,50	6,00	LW 1500 x SW 3000		
			LW 2000 - 2500 x SW 2000 Max		

♦ Framing profiles: see page 192