


SIDE A




Omega

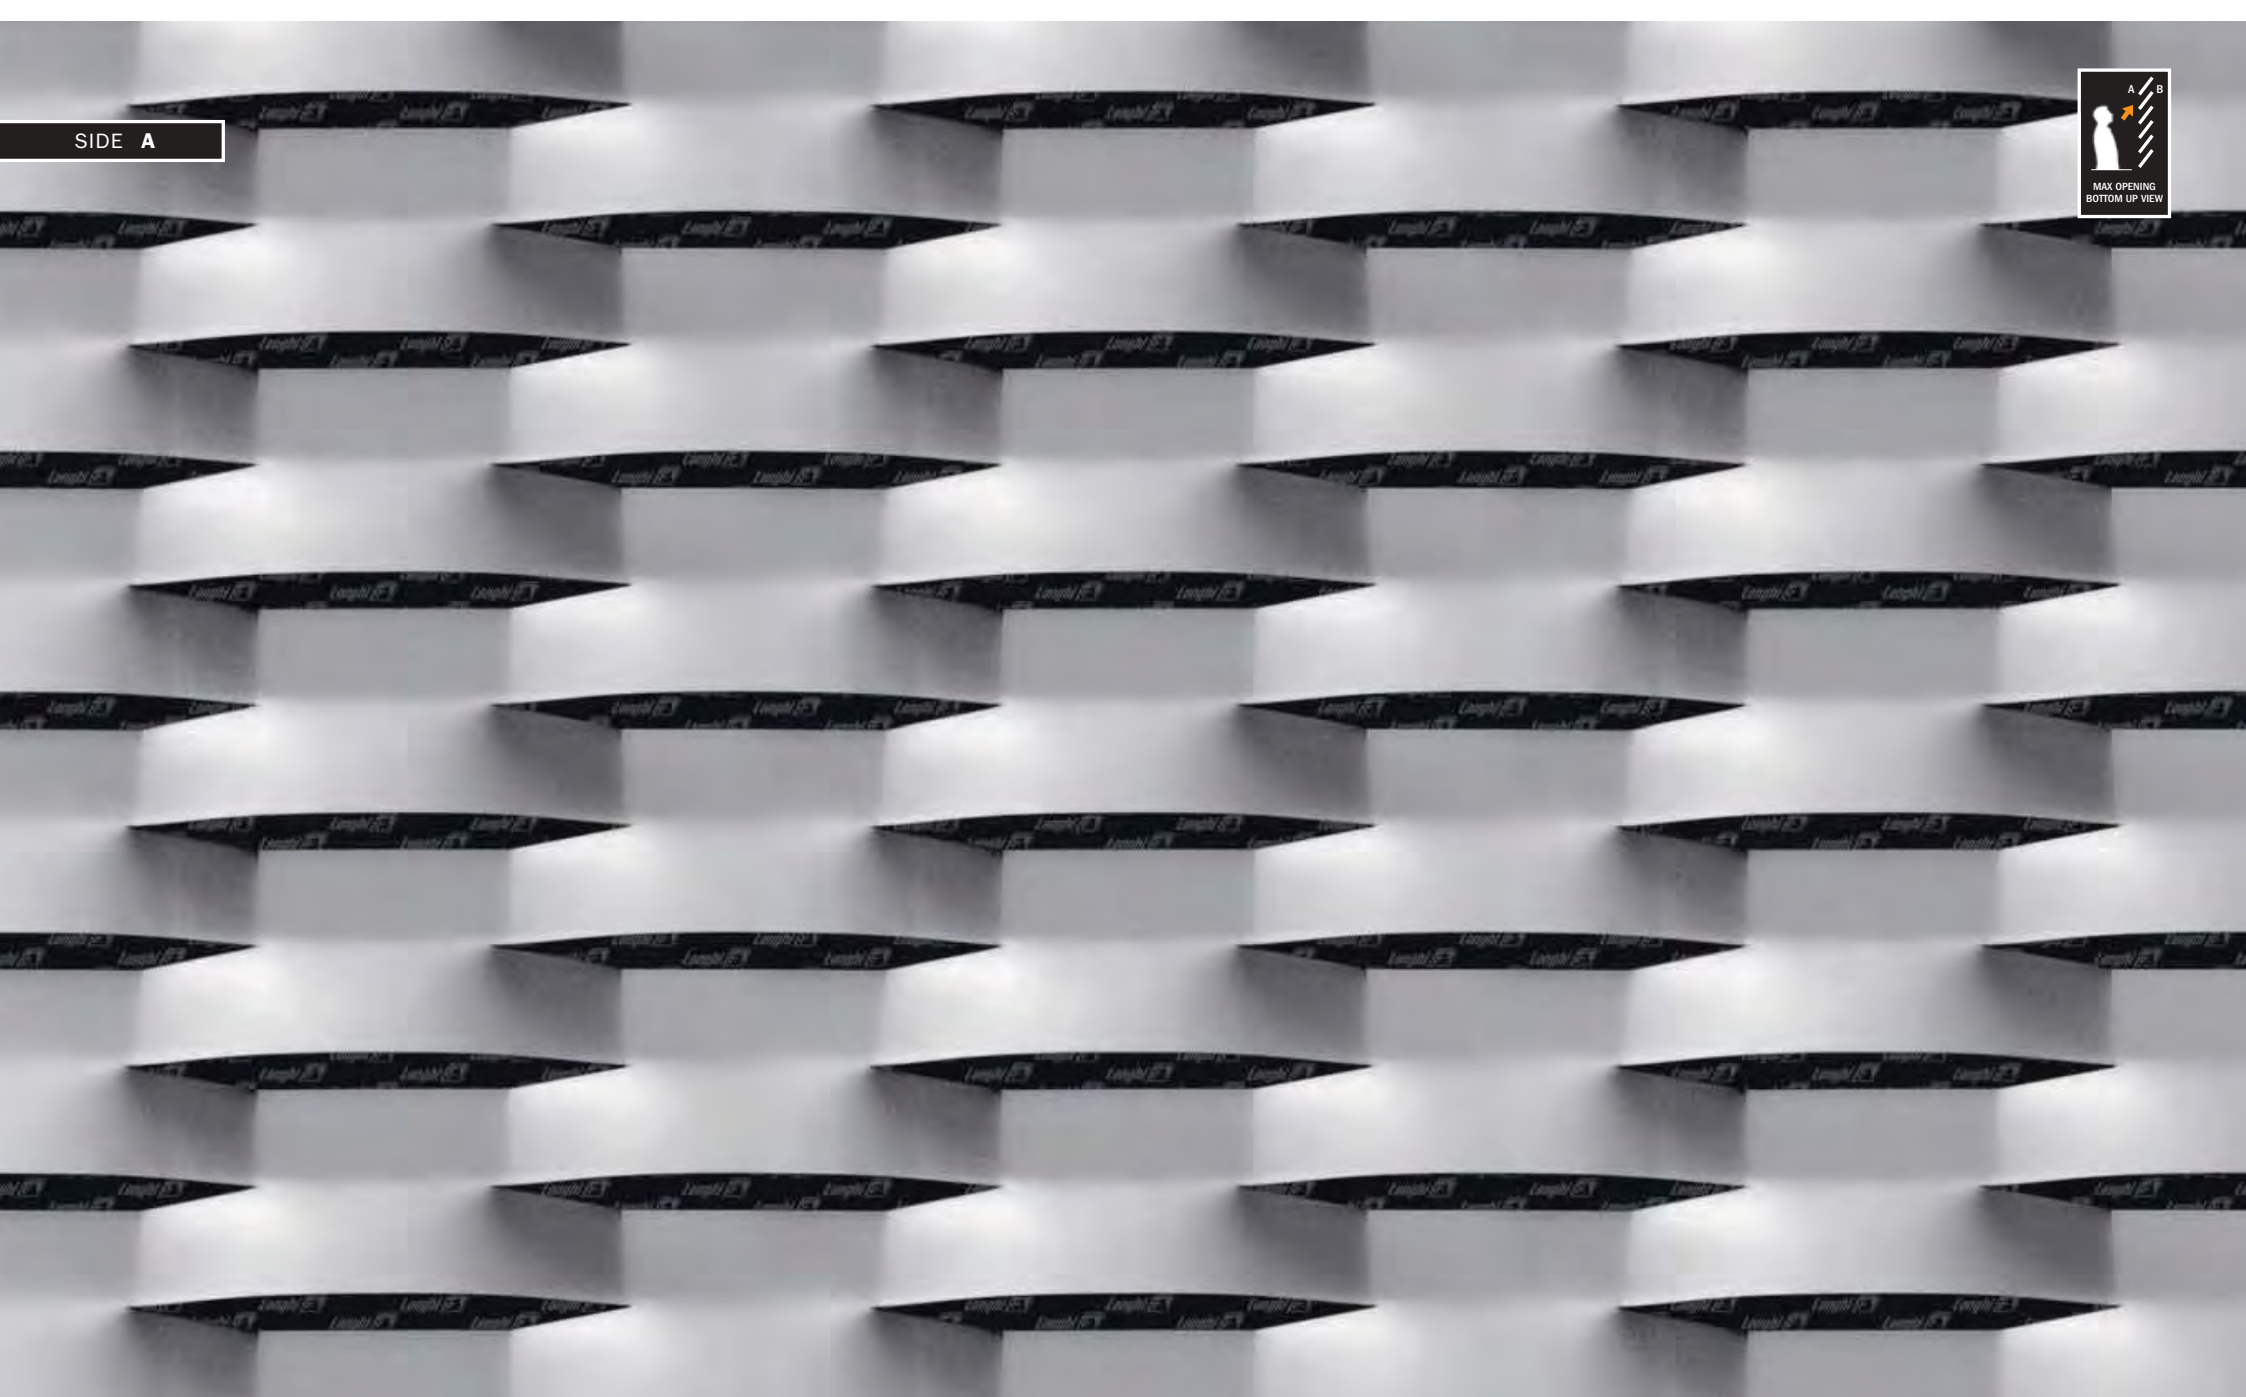

E 160 x 40 (52) - 24 x t


|TYPE| LW | SW NOMINAL | SW ACTUAL | w | t



Type - LW x SW (SW actual) - w x t (mm)	Mild steel (kg/m ²)	Aluminium (kg/m ²)	Available sheet size (mm)	Sheet thickness (mm) measured at the centre	% front open area
E 160 x 40 (52) - 24 x 1,5	10,80	3,60	LW 1000 x SW 2000	16 (-) ◆	15 (-)
E 160 x 40 (52) - 24 x 2,0	14,40	4,80	LW 1250 x SW 2500		
E 160 x 40 (52) - 24 x 3,0	21,60	7,20	LW 1500 x SW 3000		
			LW 2000 - 2500 x SW 1600 Max		

◆ Framing profiles: see page 192

SIDE **B**

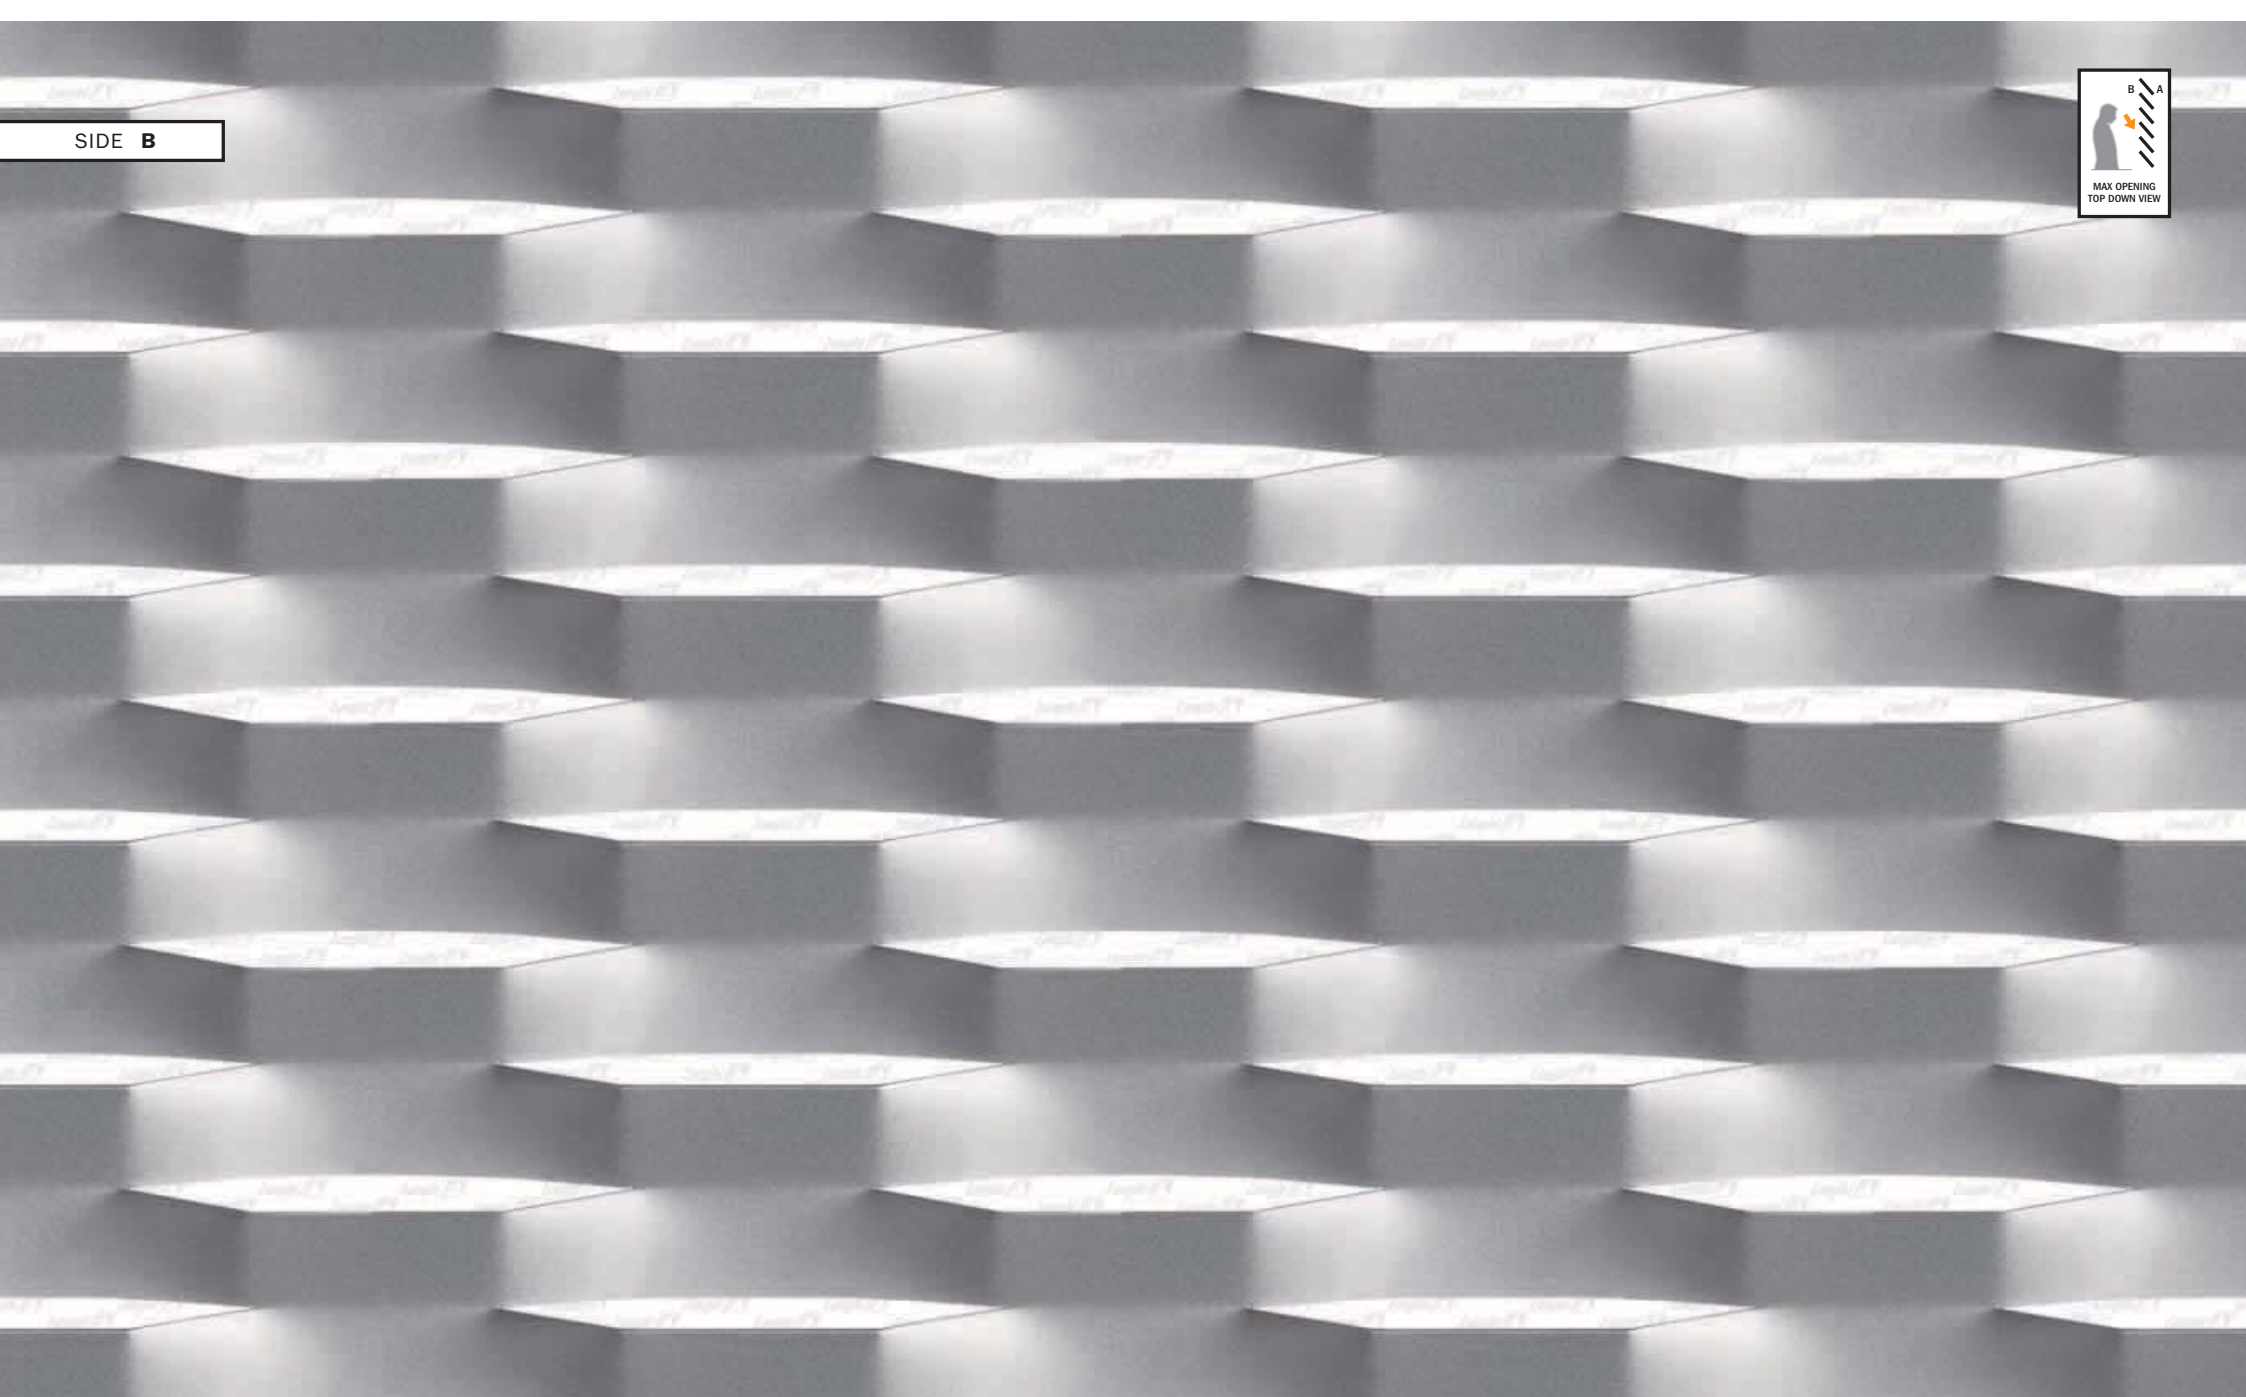


Omega



E 160 x 40 (52) - 24 x t

|TYPE| LW | SW NOMINAL | SW ACTUAL | w | t



Type - LW x SW (SW actual) - w x t (mm)	Mild steel (kg/m ²)	Aluminium (kg/m ²)	Available sheet size (mm)	Sheet thickness (mm) measured at the centre	% front open area
E 160 x 40 (52) - 24 x 1,5	10,80	3,60	LW 1000 x SW 2000	16 (-) ◆	15 (-)
E 160 x 40 (52) - 24 x 2,0	14,40	4,80	LW 1250 x SW 2500		
E 160 x 40 (52) - 24 x 3,0	21,60	7,20	LW 1500 x SW 3000		
			LW 2000 - 2500 x SW 1600 Max		

◆ Framing profiles: see page 192