


SIDE A




Sierra

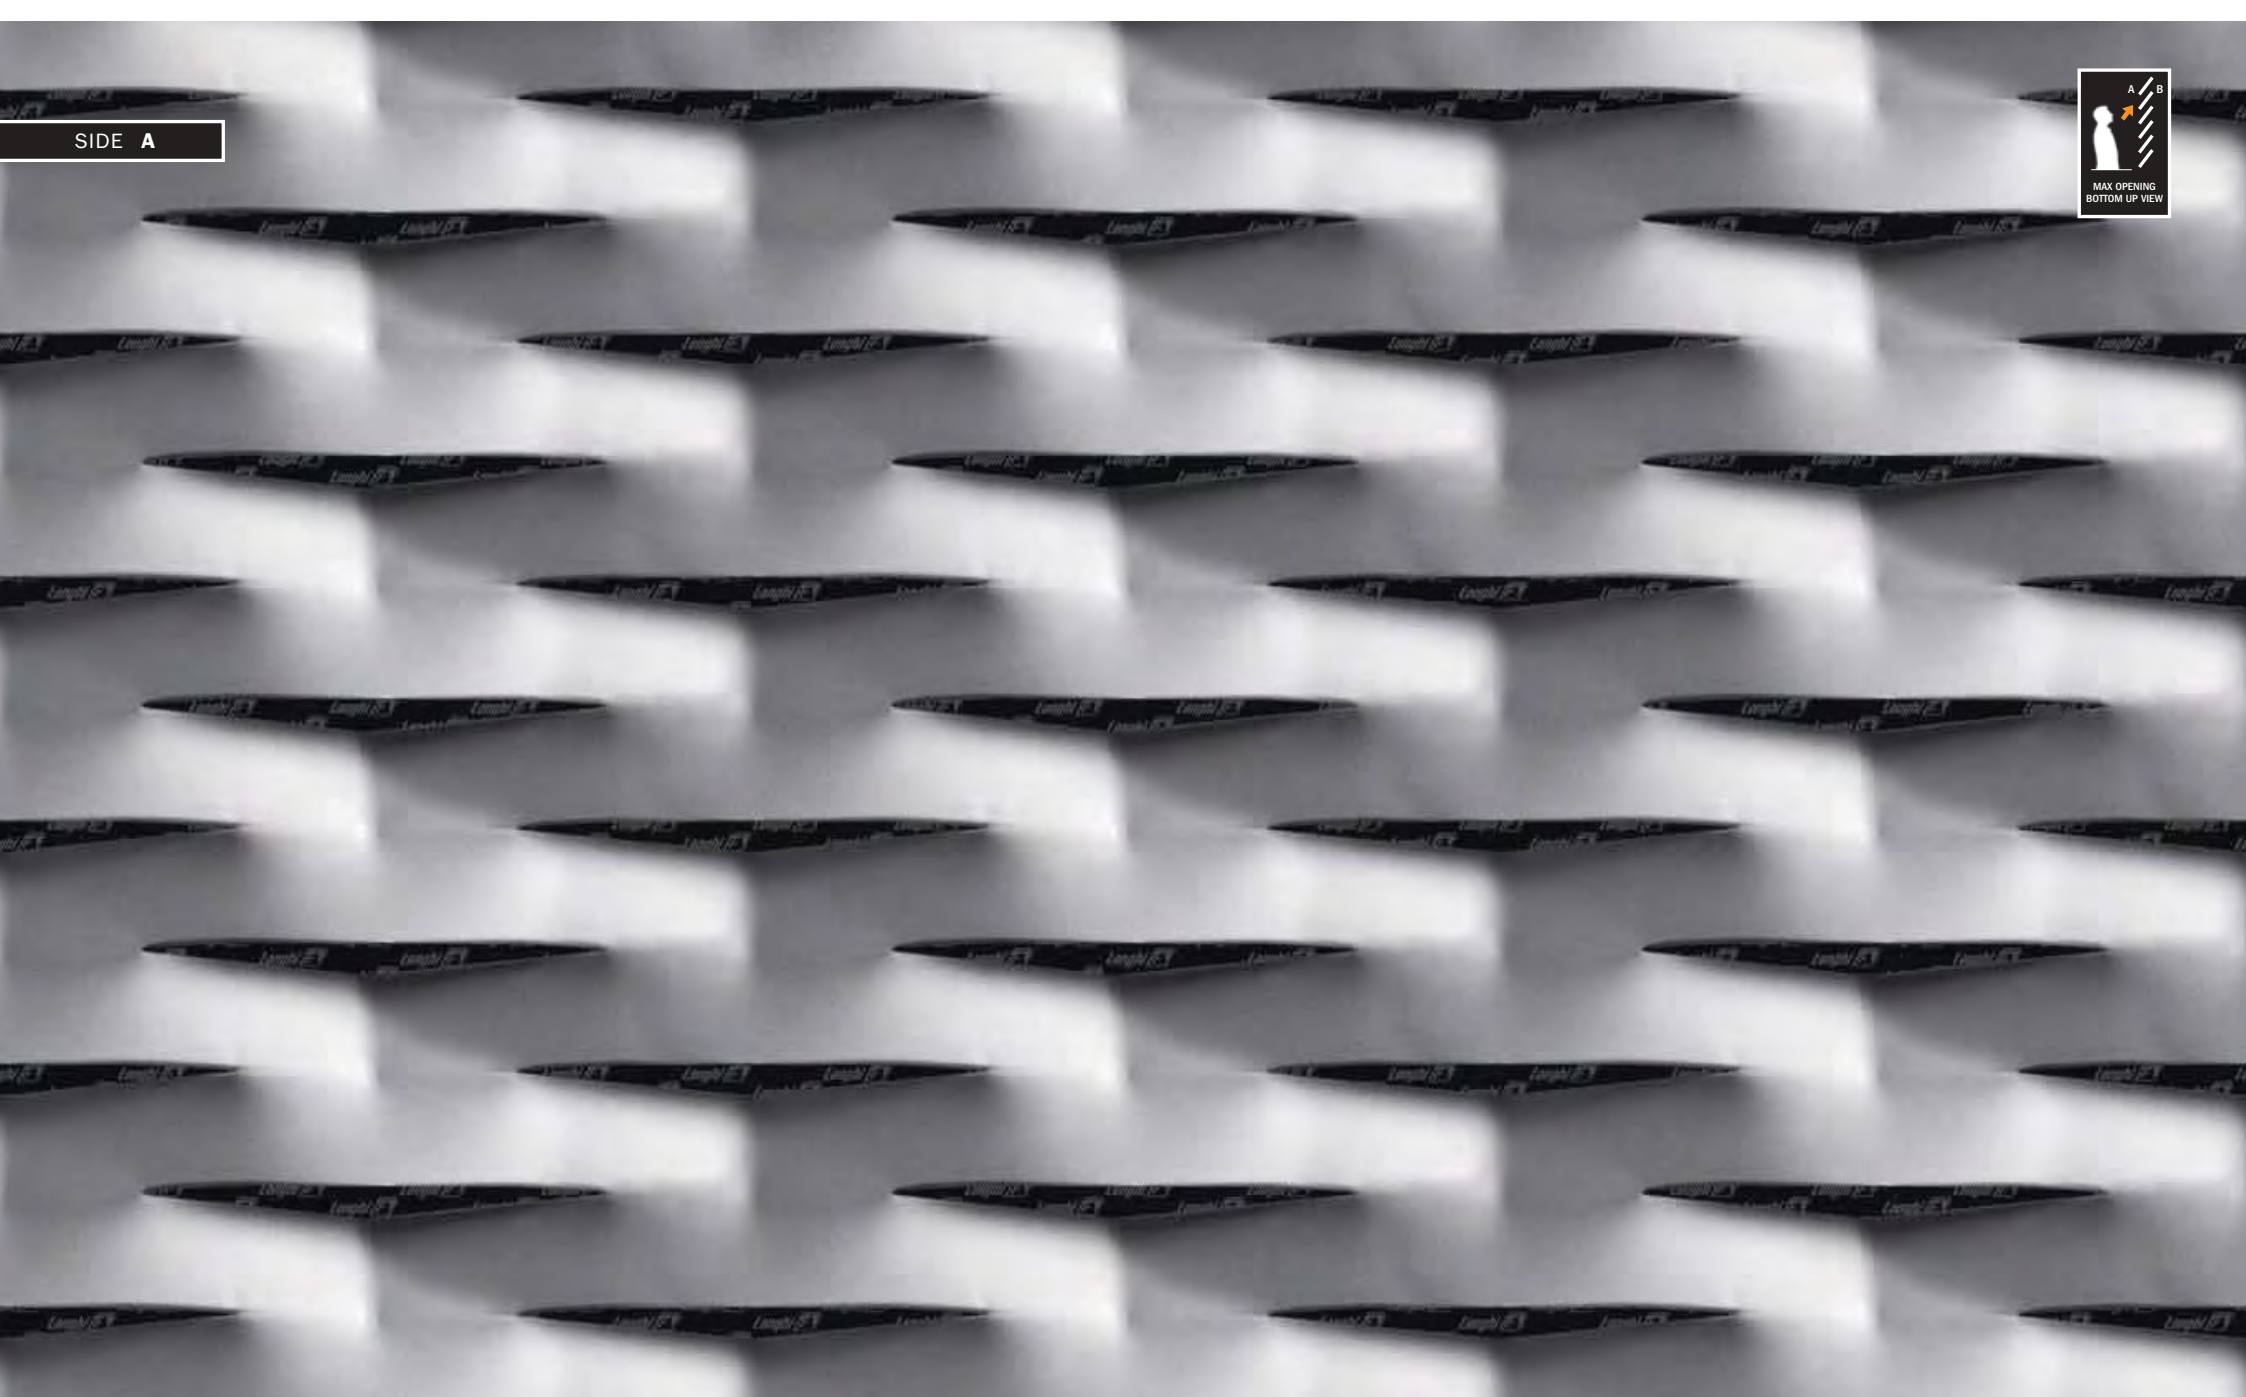

R 160 x 40 (52) - 24 x t

|TYPE| LW | SW NOMINAL | SW ACTUAL | w | t



Type - LW x SW (SW actual) - w x t (mm)	Mild steel (kg/m <sup>2</sup> )	Aluminium (kg/m <sup>2</sup> )	Available sheet size (mm)	Sheet thickness (mm) measured at the centre	% front open area
R 160 x 40 (52) - 24 x <b>1,5</b>	10,60	3,60	<b>LW 1000 x SW 2000</b>	18 (-) ◆	10,2 (-)
R 160 x 40 (52) - 24 x <b>2,0</b>	14,10	4,70	<b>LW 1250 x SW 2500</b>		
			<b>LW 1500 x SW 3000</b>		
			<b>LW 2000 - 2500 x SW 1600 Max</b>		

◆ Framing profiles: see page 192

SIDE B




**Sierra**



**R 160 x 40 (52) - 24 x t**

|TYPE |LW |SW NOMINAL |SW ACTUAL |w |t



Type - LW x SW (SW actual) - w x t (mm)	Mild steel (kg/m <sup>2</sup> )	Aluminium (kg/m <sup>2</sup> )	Available sheet size (mm)	Sheet thickness (mm) measured at the centre	% front open area
R 160 x 40 (52) - 24 x <b>1,5</b>	10,60	3,60	<b>LW 1000 x SW 2000</b>	18 (-) ◆	10,2 (-)
R 160 x 40 (52) - 24 x <b>2,0</b>	14,10	4,70	<b>LW 1250 x SW 2500</b>		
			<b>LW 1500 x SW 3000</b>		
			<b>LW 2000 - 2500 x SW 1600 Max</b>		

◆ Framing profiles: see page 192